



TDP225 Print head replacement.

Tools required: small flat-head screwdriver


1: Unplug and open the printer:

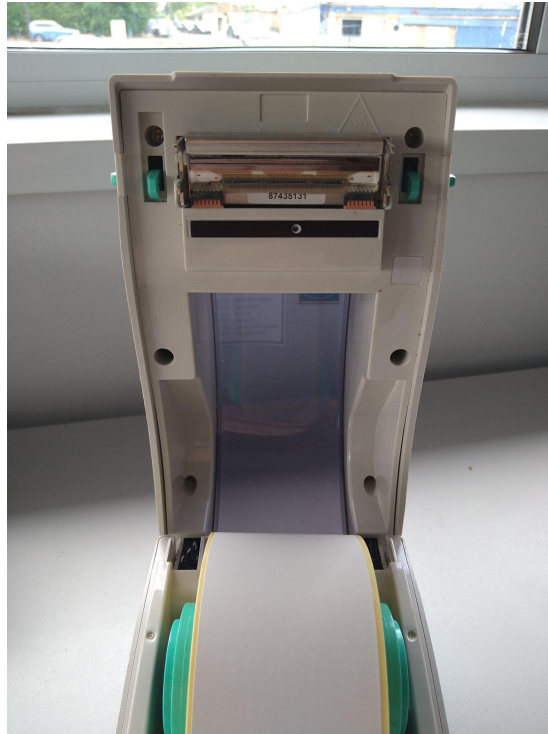


2: Unpack new head cartridge, be careful as they are delicate.

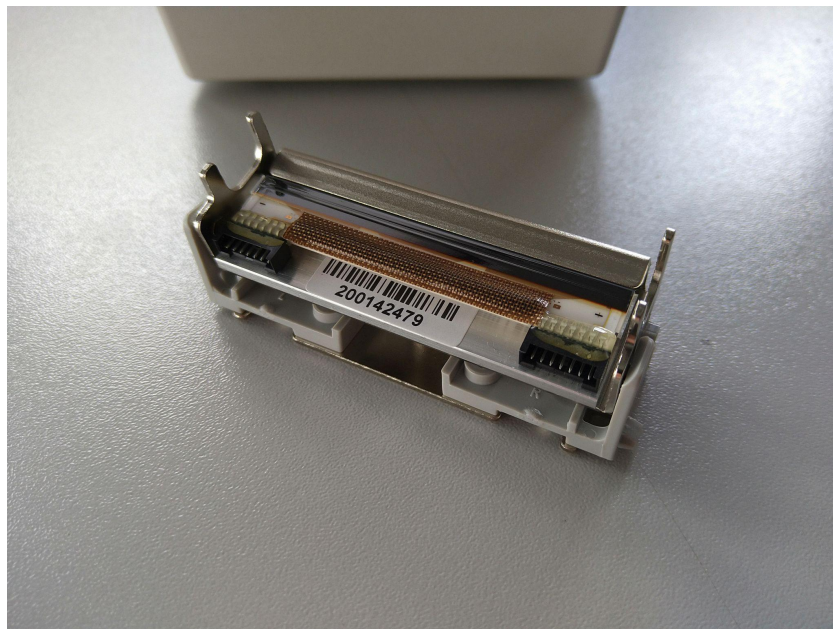


Note that the head cartridge has a grey plastic cage, **each side** is held in place with a flexible tang that clips into the lid of the printer, these are all that hold it in place, there are no screws.

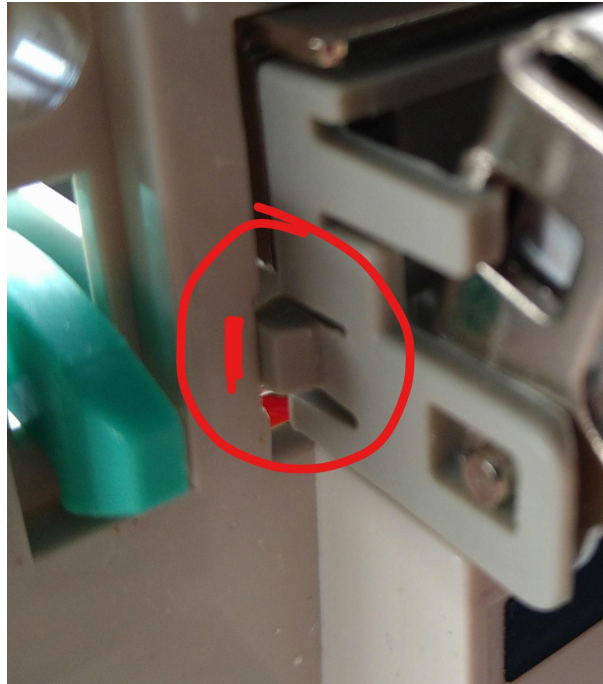

3: Carefully insert the screwdriver into this gap as shown, and prize sideways, this should bend the tang inwards and the head should start to move out of its slot, do the same to both sides and carefully work the head loose. BE CAREFUL not to damage the 2 electrical connectors.

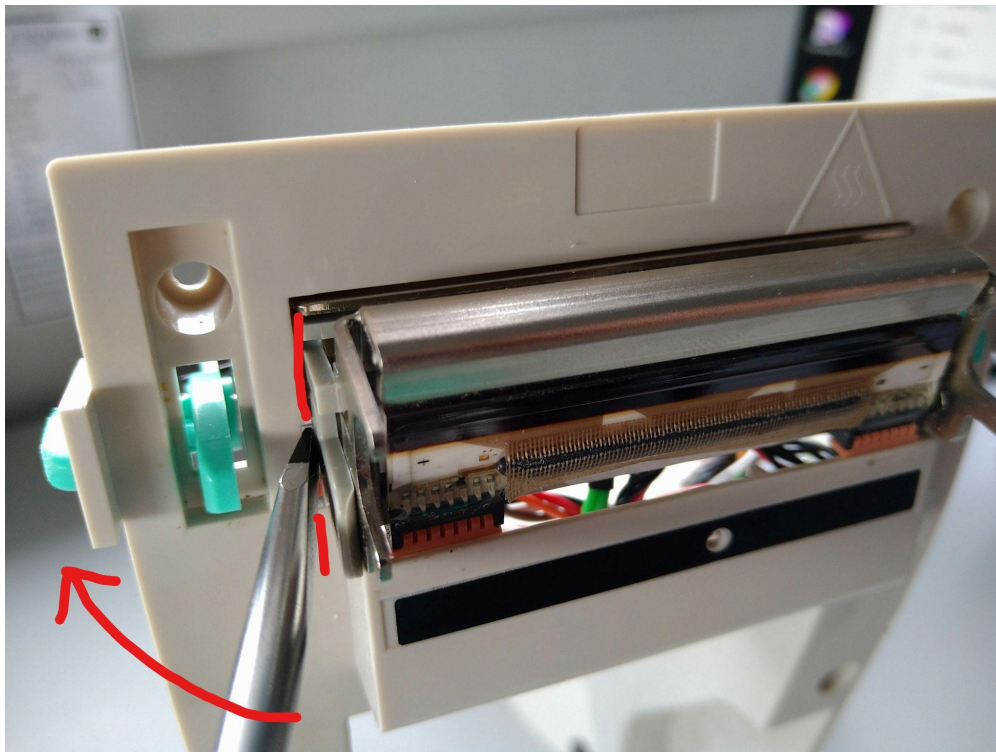

4: The head should now be loose as such, now you can carefully disconnect both electrical connectors, they just pull out.

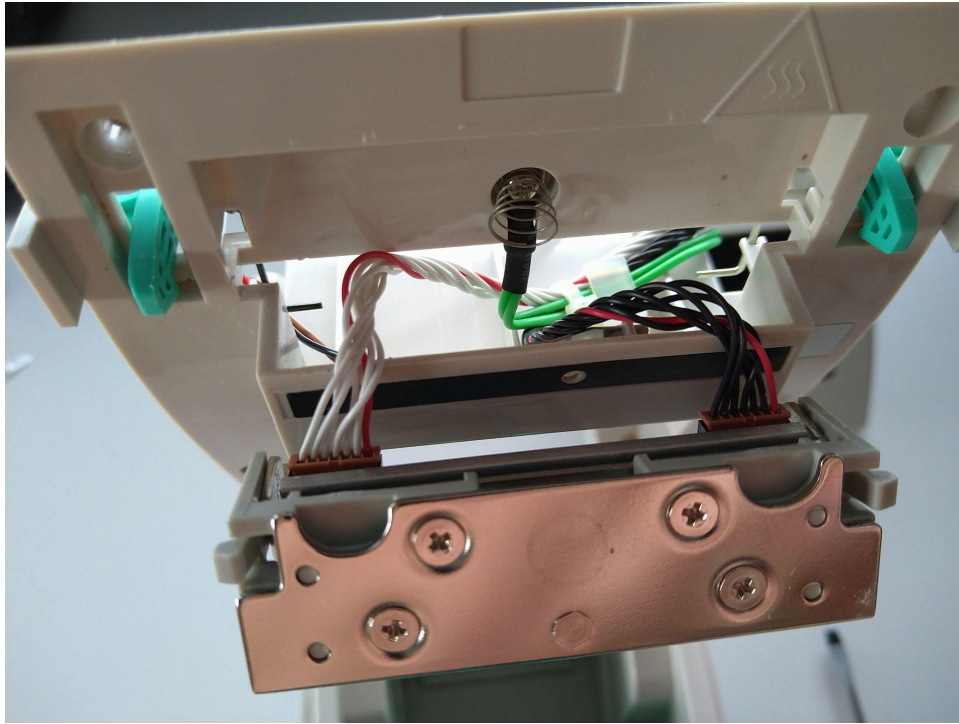

5: Connect the new head to the electrical connectors and re-align and push the head back into its slot, you may need to slightly bend in the grey plastic tangs on the new head with the screwdriver to get it to click back in place.



6: With the head back in place you are ready to test it, turn it on as normal and test a label print.

It is recommended that you regularly fully clean out your printer of all paper dust, fluff etc, and clean the new head with isopropyl alcohol.

